

Intelligent Tunable White LED Driver (Constant Voltage)

- The housing is made from V0 flame retardant PC materials from SAMSUNG/COVESTRO.
- The clamshell design and screwless type for strain-relief. The design of dismountable end cap allows you to adjust the length of housing depending on your needs.
- Change the dimming method, PWM frequency and other parameters via the APP.
- Automatically recognize 0-10V and 1-10V input signal.
- Ultra-low consumption of 0-10V ports <0.05mA.
- With soft-on and fade-in dimming function, enhancing your visual comfort.
- The whole dimming process is flicker-free with high frequency exemption level.
- Dimming from 0-100%, down to 0.01%.
- Comply with the EU's ErP Directive, networked standby<0.5W.
- Overheat, over voltage, overload, short circuit protection and automatic recovery.
- Suitable for Class I / II /III indoor light fixtures.
- Normal service life can reach 100,000 hours.
- 5-year warranty (Rubycon capacitor).

5 in 1 dimming  
0-10V  
1-10V  
10V PWM  
RX  
Push DIM

T-PWM™  
Dimming Technology

Flicker Free  
IEEE 1789

DIM/CCT

Dimmable:  
10000 : 1

NFC




Technical Specs

| Model        |                              | LM-240-24-G2A2                                                                                               |                                                        |                                                                    |
|--------------|------------------------------|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|--------------------------------------------------------------------|
| Features     | Output Type                  | Constant voltage                                                                                             |                                                        |                                                                    |
|              | Dimming Interface            | 0-10V[1-10V, 10V PWM, RX], PUSH DIM/CCT                                                                      |                                                        |                                                                    |
|              | Output Feature               | Isolation                                                                                                    |                                                        |                                                                    |
|              | Protection Grade             | IP20                                                                                                         |                                                        |                                                                    |
|              | Insulation Grade             | Class II (Suitable for class I/ II /III light fixtures)                                                      |                                                        |                                                                    |
| OUTPUT       | Output Voltage               | 24Vdc                                                                                                        |                                                        |                                                                    |
|              | Output Voltage Range         | 24Vdc±0.5Vdc                                                                                                 |                                                        |                                                                    |
|              | Output Current               | Max. 10A                                                                                                     |                                                        |                                                                    |
|              | Output Power                 | Max. 240W                                                                                                    |                                                        |                                                                    |
|              | Dimming Range                | 0~100%, down to 0.01%                                                                                        |                                                        |                                                                    |
|              | Ripple(maximum)              | 200mVp-p                                                                                                     |                                                        |                                                                    |
|              | Voltage Accuracy             | ±5%                                                                                                          |                                                        |                                                                    |
|              | PWM Frequency                | ≤22000Hz [NFC setting range 300-20000Hz]                                                                     |                                                        |                                                                    |
| INPUT        | DC Voltage Range             | 200-250Vdc                                                                                                   |                                                        |                                                                    |
|              | AC Voltage Range             | 220-240Vac                                                                                                   |                                                        |                                                                    |
|              | EoFv                         | 99.6%                                                                                                        |                                                        |                                                                    |
|              | Input Voltage                | 220-240Vac                                                                                                   |                                                        |                                                                    |
|              | Frequency                    | 50/60Hz                                                                                                      |                                                        |                                                                    |
|              | Input Current                | Max. 1.18A/230Vac                                                                                            |                                                        |                                                                    |
|              | Power Factor                 | PF>0.99/230Vac, at full load                                                                                 |                                                        |                                                                    |
|              | THD                          | THD≤5%@230Vac, at full load                                                                                  |                                                        |                                                                    |
|              | Efficiency (Typ.)            | 94%                                                                                                          |                                                        |                                                                    |
|              | Inrush Current               | Cold start 55A[Test twidth=1200us tested under 50% Ipeak]/230Vac                                             |                                                        |                                                                    |
|              | Anti Surge                   | L-N: 2KV                                                                                                     |                                                        |                                                                    |
|              | Leakage Current              | Max. 0.5mA                                                                                                   |                                                        |                                                                    |
| ENVIRONMENT  | Working Temperature          | ta: -20 ~ 45°C tc: 86°C                                                                                      |                                                        |                                                                    |
|              | Working Humidity             | 20 ~ 95%RH, non-condensing                                                                                   |                                                        |                                                                    |
|              | Storage Temperature/Humidity | -40 ~ 80°C/10~95%RH                                                                                          |                                                        |                                                                    |
|              | Temperature Coefficient      | ±0.03%/°C[0-50°C]                                                                                            |                                                        |                                                                    |
|              | Vibration                    | 10~500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively                                           |                                                        |                                                                    |
| PROTECTION   | Overload Protection          | Shut down the output when rated power≥102%, auto recovers                                                    |                                                        |                                                                    |
|              | Overheat Protection          | Intelligently adjust or turn off the output current if the PCB temperature ≥110°C, and recover automatically |                                                        |                                                                    |
|              | Overvoltage Protection       | Shut down the output when voltage≥28V, and recover automatically                                             |                                                        |                                                                    |
|              | Short Circuit Protection     | Enter hiccup mode if short circuit occurs, and recover automatically                                         |                                                        |                                                                    |
| SAFETY & EMC | Withstand Voltage            | I/P-O/P: 3750Vac                                                                                             |                                                        |                                                                    |
|              | Insulation Resistance        | I/P-O/P: 100MΩ/500VDC/25°C/70%RH                                                                             |                                                        |                                                                    |
|              | Safety Standards             | CCC                                                                                                          | China                                                  | GB19510.1, GB19510.14                                              |
|              |                              | TUV                                                                                                          | Germany                                                | EN61347-1, EN61347-2-13, EN62493                                   |
|              |                              | CB                                                                                                           | CB Member States                                       | IEC61347-1, IEC61347-2-13                                          |
|              |                              | CE                                                                                                           | European Union                                         | EN61347-1, EN61347-2-13, EN62384                                   |
|              |                              | KC                                                                                                           | Korea                                                  | KC61347-1, KC61347-2-13                                            |
|              |                              | EAC                                                                                                          | Russia                                                 | IEC61347-1, IEC61347-2-13                                          |
|              |                              | RCM                                                                                                          | Australia                                              | AS 61347-1, AS 61347-2-13                                          |
|              |                              | ENEC                                                                                                         | Europe                                                 | EN61347-1, EN61347-2-13, EN62384                                   |
|              |                              | UKCA                                                                                                         | Britain                                                | BS EN 61347-1, BS EN 61347-2-13, BS EN 62493                       |
|              | EMC Emission                 | CCC                                                                                                          | China                                                  | GB/T17743, GB17625.1                                               |
|              |                              | CE                                                                                                           | European Union                                         | EN55015, EN61000-3-2, EN61000-3-3, EN61547                         |
|              |                              | KC                                                                                                           | Korea                                                  | KSC 9815, KSC 9547                                                 |
|              |                              | EAC                                                                                                          | Russia                                                 | IEC62493, IEC61547, EH55015                                        |
|              |                              | RCM                                                                                                          | Australia                                              | EN55015, EN61000-3-2, EN61000-3-3, EN61547                         |
|              |                              | UKCA                                                                                                         | Britain                                                | BS EN IEC 55015, BS EN IEC 61000-3-2, BS EN 61000-3-3, BS EN 61547 |
|              |                              | EMC Immunity                                                                                                 | EN61000-4-2,3,4,5,6,8,11, EN61547                      |                                                                    |
| ErP          | Power Consumption            | Networked standby                                                                                            | <0.5W (After shutdown by command)                      |                                                                    |
|              |                              | No-load power consumption                                                                                    | <0.5W (When the lamp is not connected)                 |                                                                    |
|              | Flicker/Stroboscopic Effect  | IEEE 1789                                                                                                    | Meet IEEE 1789 standard/High frequency exemption level |                                                                    |
|              |                              | CIE SVM                                                                                                      | Pst LM≤1.0, SVM≤0.4                                    |                                                                    |
|              |                              | DF                                                                                                           | Phase factor                                           | DF≥0.9                                                             |
| OTHERS       | Weight[N.W.]                 | 555g±10g                                                                                                     |                                                        |                                                                    |
|              | Dimensions                   | 380×49.5×30mm(L×W×H)                                                                                         |                                                        |                                                                    |

The driver is suitable for connecting resistor current-limiting LED fixture (e.g. LED strip). The inrush current will be dozens of times increased if connecting built-in constant current IC current-limiting LED fixtures, the driver will activate the overloaded protection (hiccups flickering). When you order, please remark controlling the constant current LED fixture (e.g. MR16 lamp, underground light, LED wall washer, constant current LED strip, etc.), so that we can prepare them with special procedures.

## Product Size


Unit: mm

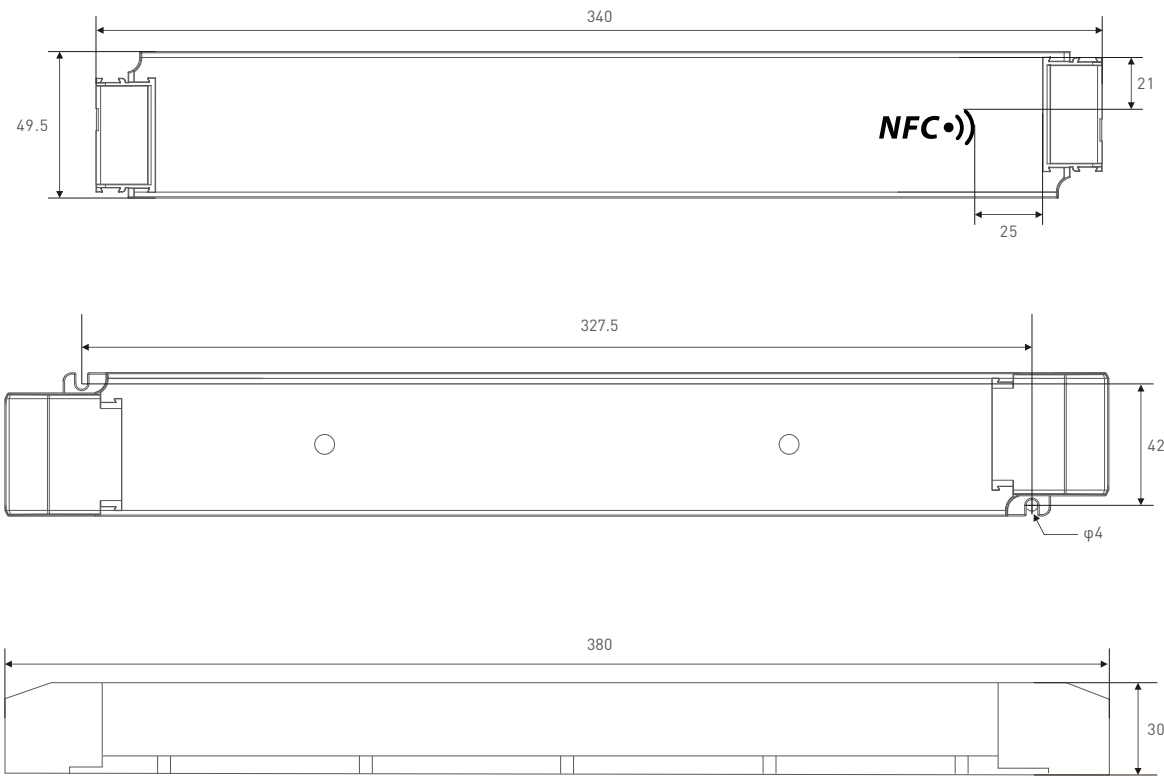


## Wiring Diagram

## 0-10V Connection


### 1. Brightness adjustment.

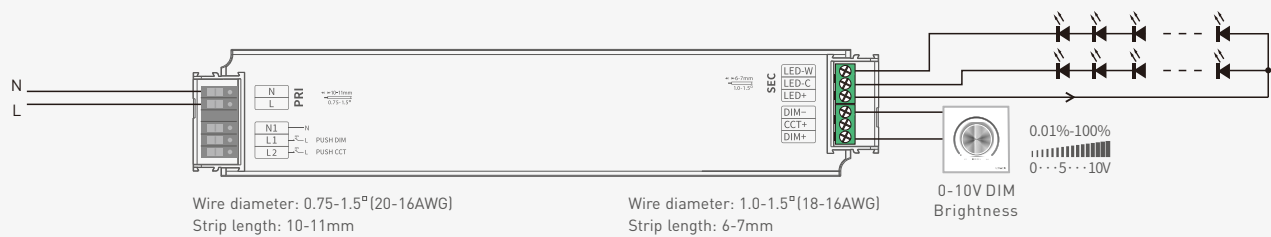

## 2. Color temperature adjustment.

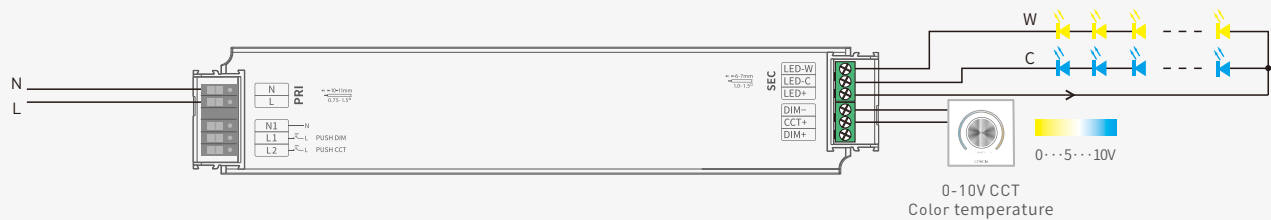

3. Brightness and color temperature adjustment respective.

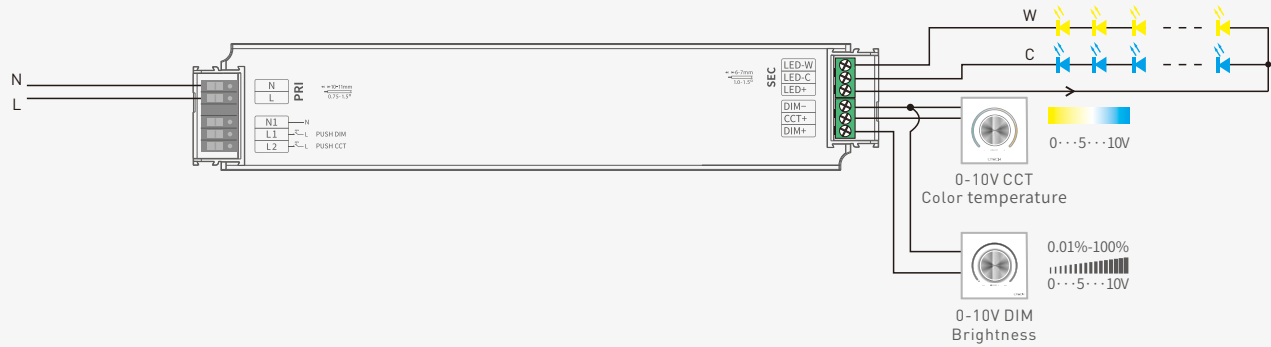


4. Brightness and color temperature adjustment simultaneous.




Push DIM/CCT Connection


1. Brightness adjustment.

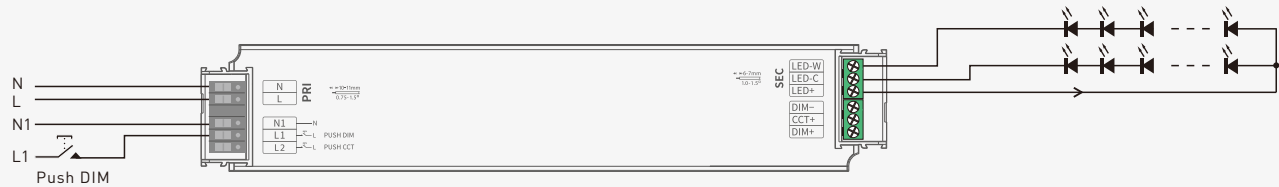

2. Color temperature adjustment.

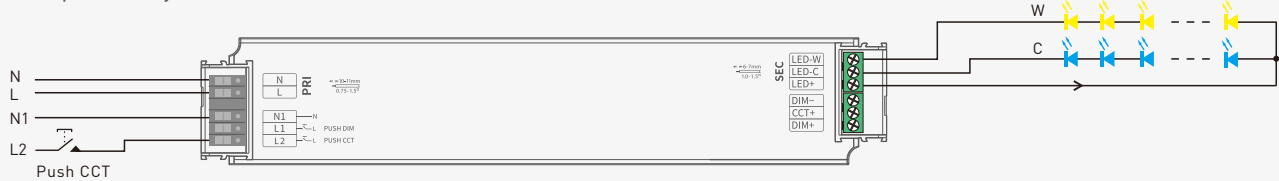

3. Brightness and color temperature adjustment respective.

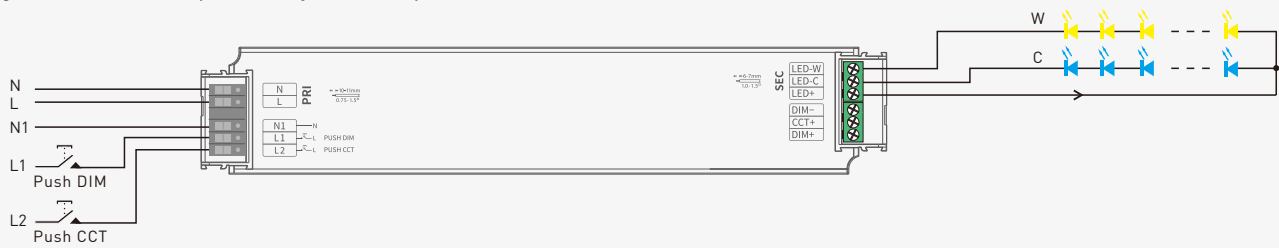

4. Brightness and color temperature adjustment simultaneous.




\* Dimming interface priority: First 0-10V, next Push DIM/CCT.

Four-wire LED connection



\* Adopting constant power program design, it keeps the same brightness in color temperature dimming, twice the rated power load can be connected.  
240W driver, 240Wx2CH load can be connected, the total power of the 2 channels will be kept in 240W.

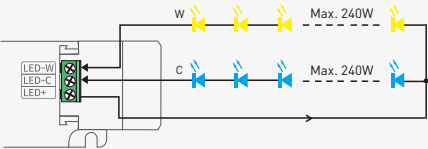

Push DIM/CCT



Reset switch

DIM

- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the brightness goes to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning on again.

\* Applicable to brightness adjustment, color temperature adjustment and brightness/CT adjustment respective of Push DIM/CCT connection.

CCT

- Color temperature adjustment: Long press.
- With every other long press, color temperature go to the opposite direction.
- Color temperature memory: Color temperature will be the same as previously adjusted when turning on again.




Reset switch

DIM/CCT


- On/off control: Short press.
- Stepless dimming and color adjustment: long press.
- With every other long press, color temperature go to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning on again.

\* Applicable to brightness and CT adjustment simultaneous of Push DIM/CCT connection.

Protective Housing Application Diagram

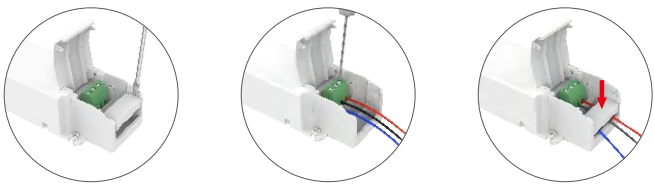


Use a screwdriver to pry up the protective housing at the edge of the wire fixing board. Then connect to the wires as the diagram shows and press down the wire fixing board.

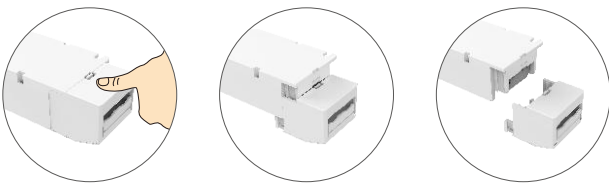

Press down the back side of the protective housing and move it from side to side to remove it.

Installation Precautions

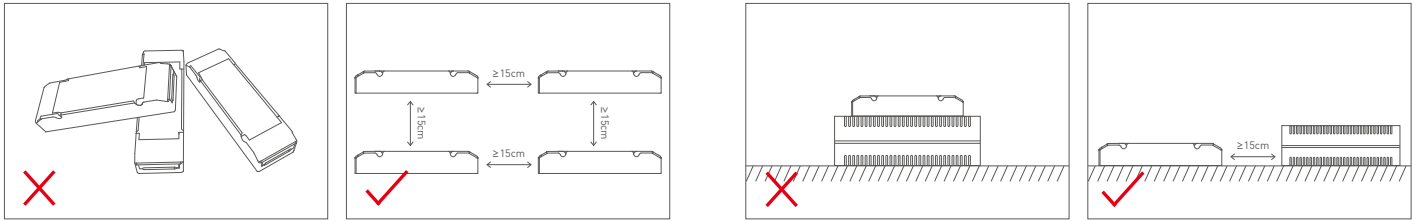

Please do not stack the products. The distance between two products should be  $\geq 15\text{cm}$  so as not to affect heat dissipation and the lifespan of the products.

Note: The temperature within the installation area should be within the working temperature range of the products. Please do not install products inside LED fixtures to avoid temperature exceeding the working temperature that may affect the product lifetime.

Please not place the products on LED drivers. The distance between the product and the driver should be  $\geq 15\text{cm}$  so as not to affect heat dissipation and shorten the lifespan of the products.

Use the NFC Lighting APP

Scan the QR code below with your mobile phone and follow the prompts to complete the APP installation (According to performance requirements, you need to use a NFC-capable Android phone, or an iphone 8 and later that are compatible with iOS 13 or higher).




\* Before you begin setting the parameters of the driver, please make sure the driver is powered off.

Read/Write the LED driver

Use your NFC-capable phone to read LED driver data, then edit the parameters and they can be directly written to the driver.

1. Read the LED driver

On the APP home page, click [Read/Write LED driver] , then keep the programmer’s sensing area close to the NFC logo of the driver to read the driver parameters.

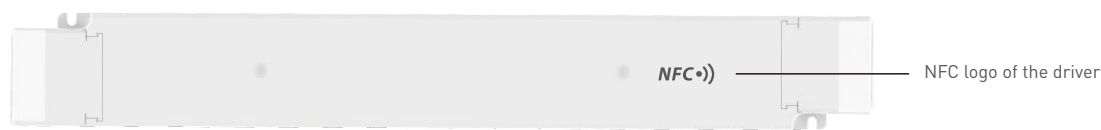


2. Edit the parameters





Click [Parameter settings] to edit the advanced parameters, like dimming type, power-on fading time, PWM frequency, etc.

3. Write to the driver

After completing the parameter settings, click [Write] in the upper right corner, and keep the programmer’s sensing area close to the NFC logo of the driver, so the parameters can be written to the driver.

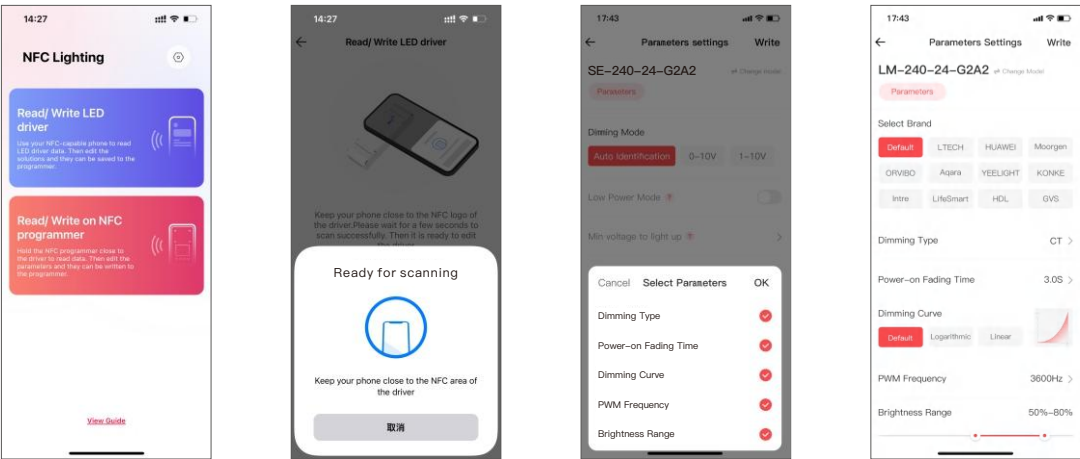

Relationship Diagrams

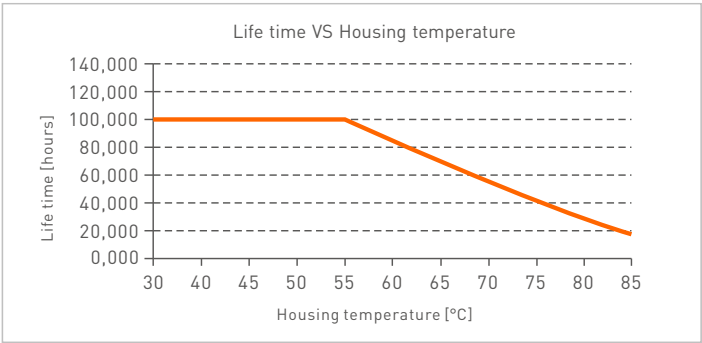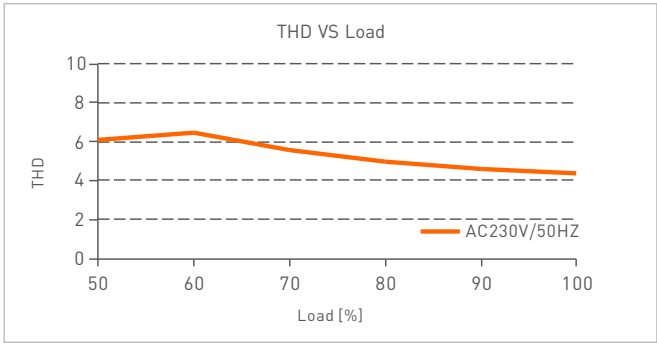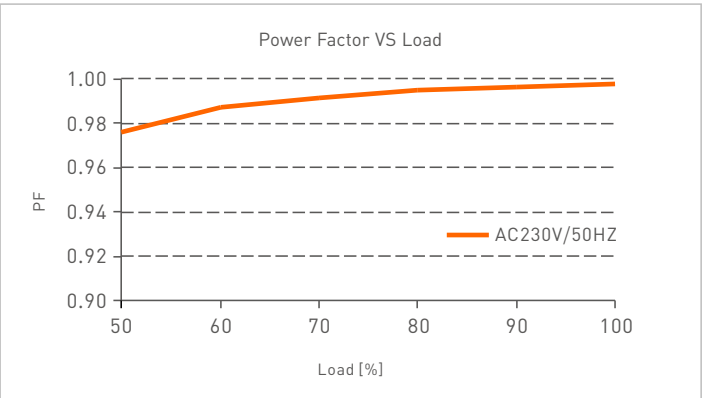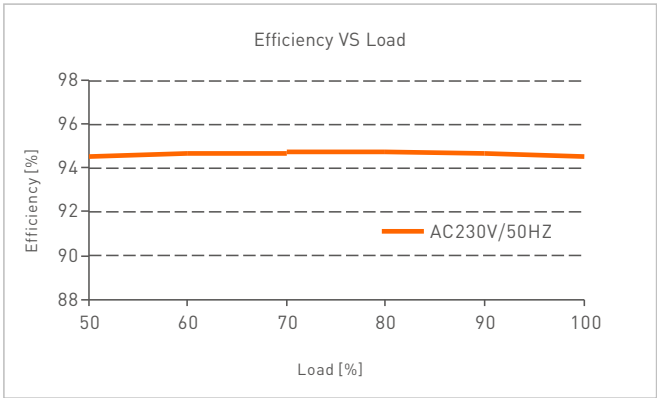


Flicker Test Form

IEEE 1789

| Limit of Modulation in low risk area  |                                                 |
|---------------------------------------|-------------------------------------------------|
| Waveform frequency of optical output  | limit (%)                                       |
| $f \leq 8\text{Hz}$                   | 0.2                                             |
| $8\text{Hz} < f \leq 90\text{Hz}$     | $0.025 \times f$                                |
| $90\text{Hz} < f \leq 1250\text{Hz}$  | $0.08 \times f$                                 |
| $f > 1250\text{Hz}$                   | Exemption assessment                            |
| Limit of Modulation in no effect area |                                                 |
| Waveform frequency of optical output  | limit (%)                                       |
| $f \leq 10\text{Hz}$                  | 0.1                                             |
| $10\text{Hz} < f \leq 90\text{Hz}$    | $0.01 \times f$                                 |
| $90\text{Hz} < f \leq 3125\text{Hz}$  | $[0.08/2.5] \times f$                           |
| $f > 3125\text{Hz}$                   | Exemption assessment (High frequency exemption) |


- Brightness
- 0.1 %
  - 1 %
  - 5 %
  - 10 %
  - 20 %
  - 30 %
  - 40 %
  - 50 %
  - 60 %
  - 70 %
  - 80 %
  - 90 %
  - 100 %

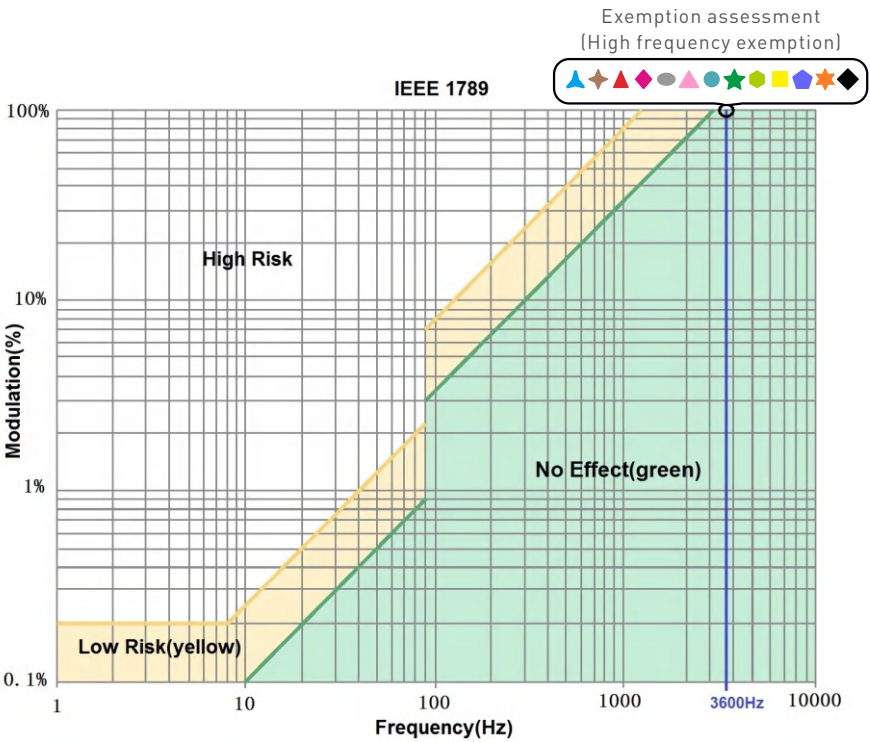

Packaging Specifications

|                   |                                              |
|-------------------|----------------------------------------------|
| Model             | LM-240-24-G2A2                               |
| Carton Dimensions | 400×350×120mm(L×W×H)                         |
| Quantity          | 10 PCS/Layer; 2 Layers/Carton; 20 PCS/Carton |
| Weight            | 0.555 kg/PC; 12 kg±5%/Carton                 |

Packaging Image

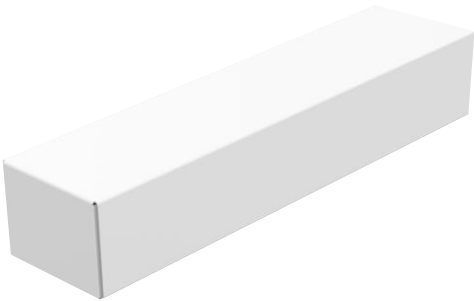

Inner Packaging Box



Carton Packaging

Transportation and Storage

1. Transportation

Products can be shipped via vehicles, boats and planes.

During transportation, products should be protected from rain and sun. Please avoid severe shock and vibration during the loading and unloading process.

2. Storage

The storage conditions should comply with the Class I Environmental Standards. The products that have been stored for more than six months are recommended to be re-inspected and can be used only after they have been qualified.

Attentions

- Products shall be installed by qualified professionals.
  - LTECH products are and not lightningproof non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure they are mounted in a water proof enclosure or in an area equipped with lightning protection devices.
  - Good heat dissipation will prolong the working life of products. Please ensure good ventilation.
  - Please check if the working voltage used complies with the parameter requirements of products.
  - The diameter of wire used must be able to load the light fixtures you connect and ensure the firm wiring.
  - Before you power on products, please make sure all the wiring is correct in case of incorrect connection that causes damage to light fixtures.
  - If a fault occurs, please do not attempt to fix products by yourself. If you have any question, please contact your suppliers.
- ✱ This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery: 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.



Update Log

| Version | Updated Time | Update Content   | Updated by |
|---------|--------------|------------------|------------|
| A0      | 2023.02.28   | Original version | Liu Weili  |

LED智能色温驱动器 (恒压型)

- 外壳采用科思创/三星PC阻燃V0级原料
- 免螺丝压线翻盖设计，可拆卸端盖，按需调节壳体长度
- 通过手机APP可更改调光方式、PWM频率等参数，实现驱动器数据交互功能
- 自动识别0-10V、1-10V输入
- 0-10V端口超低消耗<0.05mA
- 带软启动渐亮功能，让人眼视觉更舒服
- 0-100%全程调光无可视频闪
- 调光范围0-100%，LED从0.01%开始调光
- 欧盟ERP空载功耗、网络待机功耗<0.5W
- 过温、过载、短路保护，可自动恢复
- 适合室内Ⅰ、Ⅱ、Ⅲ类灯具应用
- 常规使用下寿命可达10万小时
- 5年保修期（采用红宝石电容）

5合1调光  
0-10V  
1-10V  
10V PWM  
RX  
Push DIM

T-PWM™  
超深度调光技术

无频闪  
IEEE 1789

Dimmable:  
10000 : 1



调光 调色温




技术参数

| 型号      |                                   | LM-240-24-G2A2                             |                     |                                                                    |
|---------|-----------------------------------|--------------------------------------------|---------------------|--------------------------------------------------------------------|
| 特征      | 输出类型                              | 恒压                                         |                     |                                                                    |
|         | 调光接口                              | 0-10V(1-10V, 10V PWM, RX), PUSH DIM/CCT    |                     |                                                                    |
|         | 输出特征                              | 隔离                                         |                     |                                                                    |
|         | 防护等级                              | IP20                                       |                     |                                                                    |
|         | 绝缘等级                              | II 类 (适用于室内 I、II、III类灯具)                   |                     |                                                                    |
| 输出      | 输出电压                              | 24Vdc                                      |                     |                                                                    |
|         | 输出电压范围                            | 24Vdc±0.5Vdc                               |                     |                                                                    |
|         | 输出电流                              | Max. 10A                                   |                     |                                                                    |
|         | 负载功率                              | Max. 240W                                  |                     |                                                                    |
|         | 调光范围                              | 0-100%，调光深度: 0.01%                         |                     |                                                                    |
|         | 纹波与噪声(最大)                         | 200mVp-p                                   |                     |                                                                    |
|         | 电压精度                              | ±5%                                        |                     |                                                                    |
|         | PWM频率                             | ≤22000Hz (NFC设置范围300-22000Hz)              |                     |                                                                    |
| 输入      | 直流电压范围                            | 200-250Vdc                                 |                     |                                                                    |
|         | 交流电压范围                            | 220-240Vac                                 |                     |                                                                    |
|         | 应急输出系数                            | EoFv=99.6%                                 |                     |                                                                    |
|         | 额定电压                              | 220-240Vac                                 |                     |                                                                    |
|         | 频率范围                              | 50/60Hz                                    |                     |                                                                    |
|         | 输入电流                              | Max. 1.18A/230Vac                          |                     |                                                                    |
|         | 功率因数                              | PF>0.99/230Vac (满载)                        |                     |                                                                    |
|         | 谐波THD                             | THD≤5%@230Vac (满载)                         |                     |                                                                    |
|         | 效率(Typ.)                          | 94%                                        |                     |                                                                    |
|         | 浪涌电流                              | 冷启动，55A/(在50%Ipeak下测试twidth=1200us)/230Vac |                     |                                                                    |
|         | 抗浪涌                               | L-N: 2KV                                   |                     |                                                                    |
|         | 漏电流                               | Max. 0.5mA                                 |                     |                                                                    |
| 环境      | 工作温度                              | ta: -20 ~ 45℃ tc: 86℃                      |                     |                                                                    |
|         | 工作湿度                              | 20 ~ 95%RH, 无冷凝                            |                     |                                                                    |
|         | 储存温度/湿度                           | -40 ~ 80℃/10~95%RH                         |                     |                                                                    |
|         | 温度系数                              | ±0.03%/℃(0-50℃)                            |                     |                                                                    |
|         | 耐振动                               | 10-500HZ, 2G 12分钟/周期, X, Y, Z轴各72分钟        |                     |                                                                    |
| 保护      | 过载保护                              | 负载功率≥102%保护，异常排除自动恢复                       |                     |                                                                    |
|         | 过温保护                              | 根据PCB温度超标情况(≥110℃)，智能调节电流输出或关闭，可自动恢复       |                     |                                                                    |
|         | 过压保护                              | 电压≥28V, 关闭输出，可自动恢复                         |                     |                                                                    |
|         | 短路保护                              | 输出线路短路进入打嗝模式，可自动恢复                         |                     |                                                                    |
| 安规和电磁规格 | 耐压                                | 输入对输出: 3750Vac                             |                     |                                                                    |
|         | 绝缘阻抗                              | 输入对输出: 100MΩ/500VDC/25℃/70%RH              |                     |                                                                    |
|         | 安全规范                              | CCC                                        | 中国                  | GB19510.1, GB19510.14                                              |
|         |                                   | TUV                                        | 德国                  | EN61347-1, EN61347-2-13, EN62493                                   |
|         |                                   | CB                                         | CB成员国               | IEC61347-1, IEC61347-2-13                                          |
|         |                                   | CE                                         | 欧盟                  | EN61347-1, EN61347-2-13, EN62384                                   |
|         |                                   | KC                                         | 韩国                  | KC61347-1, KC61347-2-13                                            |
|         |                                   | EAC                                        | 俄罗斯                 | IEC61347-1, IEC61347-2-13                                          |
|         |                                   | RCM                                        | 澳洲                  | AS 61347-1, AS 61347-2-13                                          |
|         |                                   | ENEC                                       | 欧洲                  | EN61347-1, EN61347-2-13, EN62384                                   |
|         |                                   | UKCA                                       | 英国                  | BS EN 61347-1, BS EN 61347-2-13, BS EN 62493                       |
|         | 电磁兼容发射                            | CCC                                        | 中国                  | GB/T17743, GB17625.1                                               |
|         |                                   | CE                                         | 欧盟                  | EN55015, EN61000-3-2, EN61000-3-3, EN61547                         |
|         |                                   | KC                                         | 韩国                  | KSC 9815, KSC 9547                                                 |
|         |                                   | EAC                                        | 俄罗斯                 | IEC62493, IEC61547, EH55015                                        |
|         |                                   | RCM                                        | 澳洲                  | EN55015, EN61000-3-2, EN61000-3-3, EN61547                         |
|         |                                   | UKCA                                       | 英国                  | BS EN IEC 55015, BS EN IEC 61000-3-2, BS EN 61000-3-3, BS EN 61547 |
| 电磁兼容抗扰度 | EN61000-4-2,3,4,5,6,8,11, EN61547 |                                            |                     |                                                                    |
| ErP     | 功耗                                | 网络待机功耗                                     | <0.5W (通过指令开关后)     |                                                                    |
|         |                                   | 空载功耗                                       | <0.5W (不接灯具时)       |                                                                    |
|         | 频闪/频闪效应                           | IEEE 1789                                  | 满足无影响/高频豁免考核级别      |                                                                    |
|         |                                   | CIE SVM                                    | Pst LM≤1.0, SVM≤0.4 |                                                                    |
|         | DF                                | 相位因素                                       | DF≥0.9              |                                                                    |
| 其他      | 产品重量                              | 555g±10g                                   |                     |                                                                    |
|         | 产品尺寸                              | 380×49.5×30mm(L×W×H)                       |                     |                                                                    |

本款驱动器适合连接电阻限流的LED灯具 (如: LED灯条)。如果连接内置恒流IC限流的灯具，会产生几十倍的瞬间浪涌电流，导致驱动器会执行过载保护 (打嗝频闪)。下单时这类内置恒流IC限流的灯具需要注明 (如: Mr16灯杯、地埋灯、洗墙灯、恒流硬灯条等)，以便烧写特殊程序。

尺寸图

单位：mm

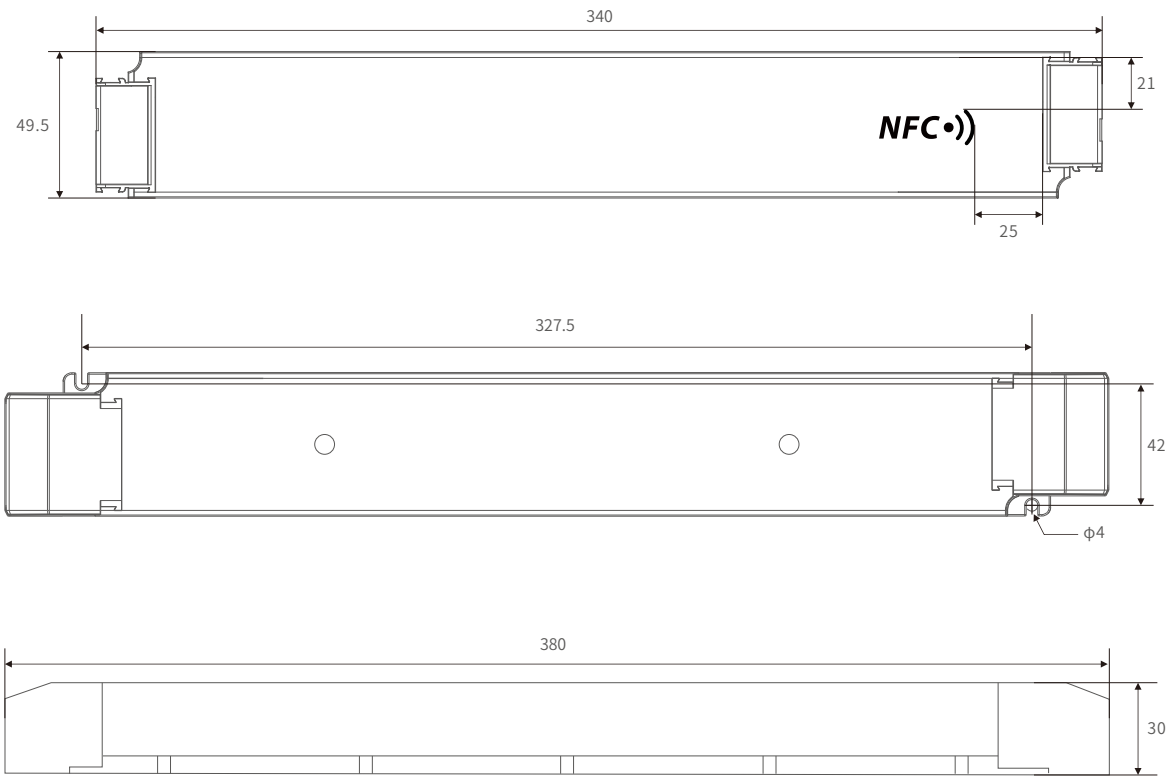


连接应用图

0-10V 连接方式


1. 亮度调节




2. 色温调节

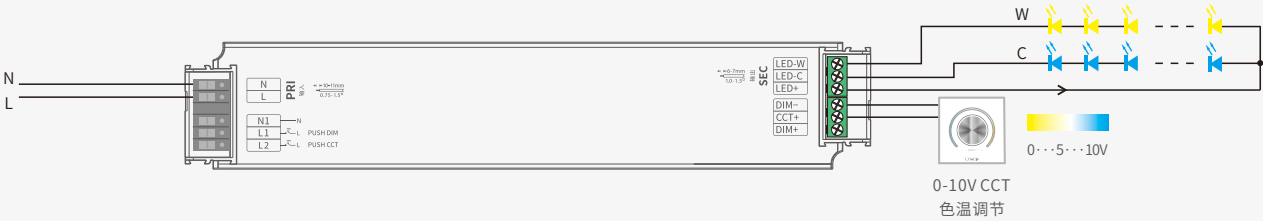

3. 亮度和色温分别调节

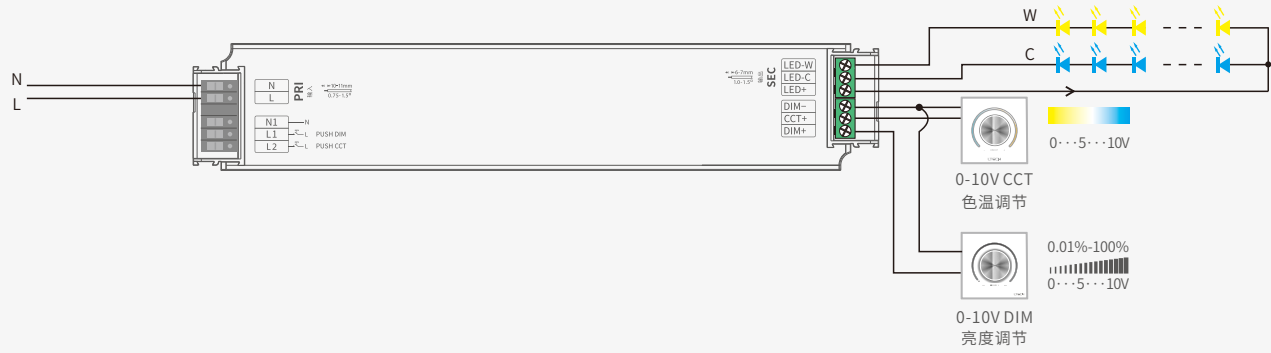


4. 亮度和色温同时调节

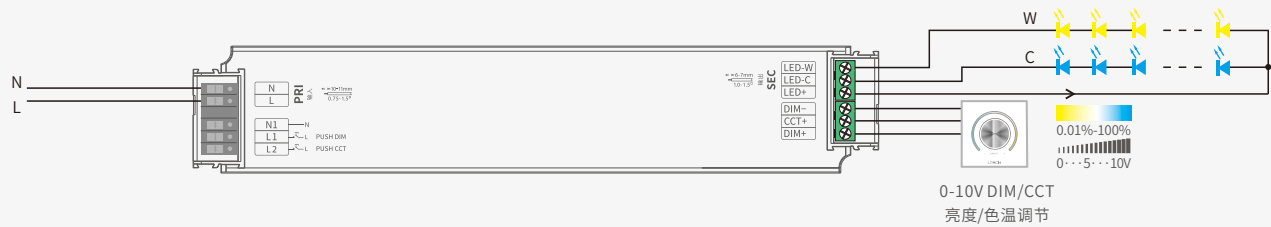

Push DIM/CCT连接方式

1. 亮度调节

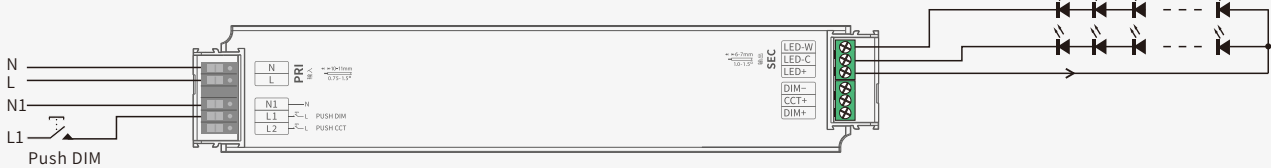


2. 色温调节




3. 亮度和色温分别调节



4. 亮度和色温同时调节

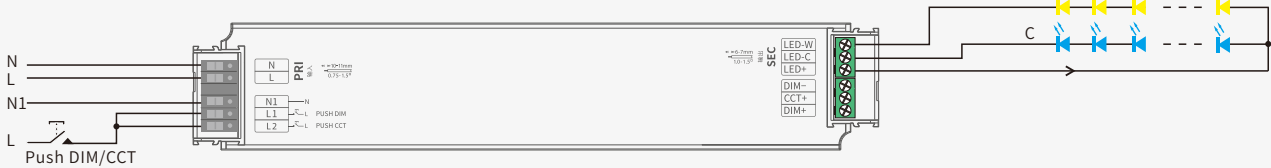

\* 调光接口优先级为：首先0-10V，然后Push DIM/CCT。

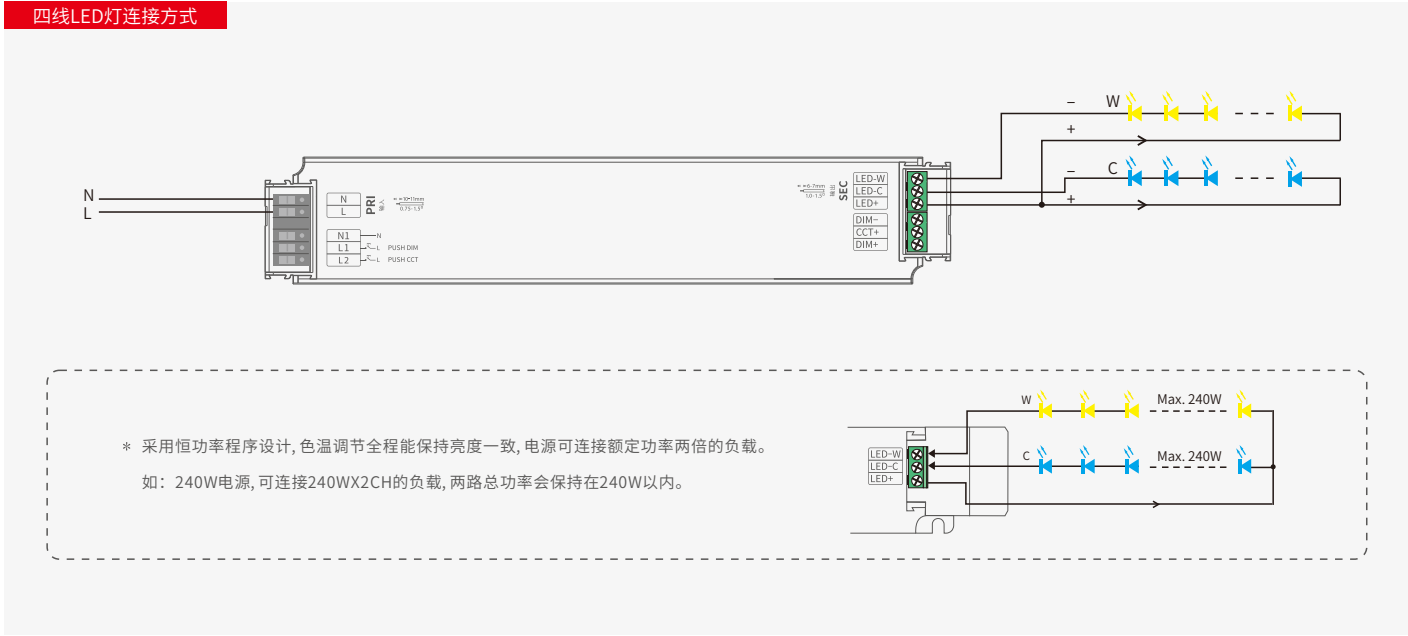

Push DIM/CCT



- DIM
- 开关控制: 短按。
  - 无级调光: 长按。
  - 每隔一次长按, 明暗度会向相反方向调整。
  - 调光记忆: 当再次开关时, 灯光会回到先前调整的亮度水平。

- CCT
- 色温调节: 长按。
  - 每隔一次长按, 色温会向相反方向调整。
  - 色温记忆: 当再次开关时, 灯光会回到先前调整的色温水平。

\* 适用于Push DIM/CCT连接方式的亮度调节、色温调节及亮度与色温单独调节。




- DIM/CCT
- 开关控制: 短按。
  - 无级调光调色: 长按。
  - 短按关灯后, 长按按键, 色温向相反方向调整。
  - 调光记忆: 当再次开关时, 灯光会回到先前调整的亮度水平。

\* 适用于Push DIM/CCT连接方式的亮度与色温同时调节。


保护盖应用图

压线安装

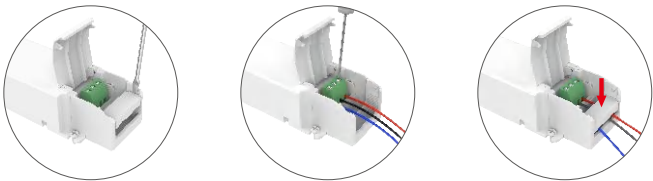


打开保护盖, 用螺丝批撬起压线板侧边即可拆下, 按照接线图接线后向下按压线板固定住线, 合上保护盖即可。

保护盖拆卸

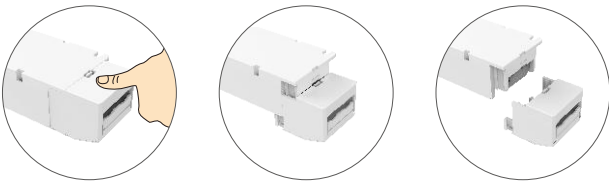

在外壳底部往下按压并左右掰动, 即可将保护盖拆下。

安装注意事项

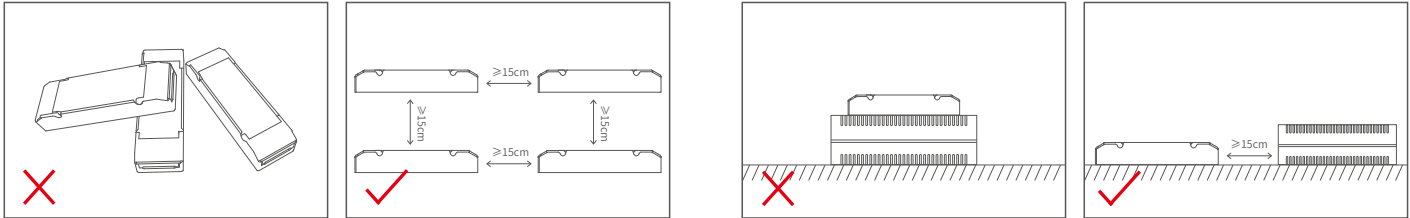

请勿将产品堆叠摆放，产品与产品间隔距离应≥15cm，避免影响产品散热和使用寿命。

注：安装需符合产品的环境工作温度，切勿安装到灯具内部，以免超出产品环境工作温度影响产品寿命。

请勿将产品置于电源上方，与电源间隔距离应≥15cm，避免影响产品散热而减少使用寿命。

搭配 NFC Lighting APP 使用

通过手机扫描下方二维码， 按提示完成APP安装。(因性能需求，要求手机型号苹果：iPhone 8及以上、且操作系统iOS13及以上； 安卓：具备NFC功能机型)




\* 设置驱动器参数时, 必须在驱动器断电情况下进行操作。

读/写智能电源

使用手机，通过NFC读取驱动器信息，根据需求设置参数后，可直接写入驱动器。

1. 读取驱动器

在APP“首页”点击【读/写智能电源】，将手机感应区域靠近驱动器NFC标识点，读取驱动器参数。

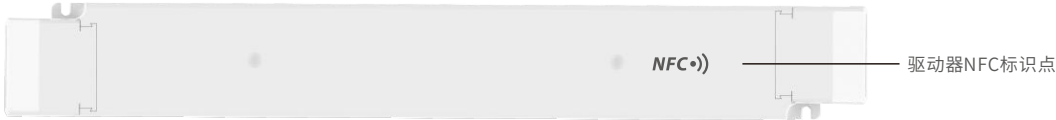


2. 编辑参数





点击【参数管理】可编辑调光方式、通电渐变时间、PWM频率等更多高级参数。

3. 写入驱动器

参数设置完成后，点击右上角【写入】，将手机感应区域靠近驱动器NFC标识点，即可写入驱动器成功修改参数。

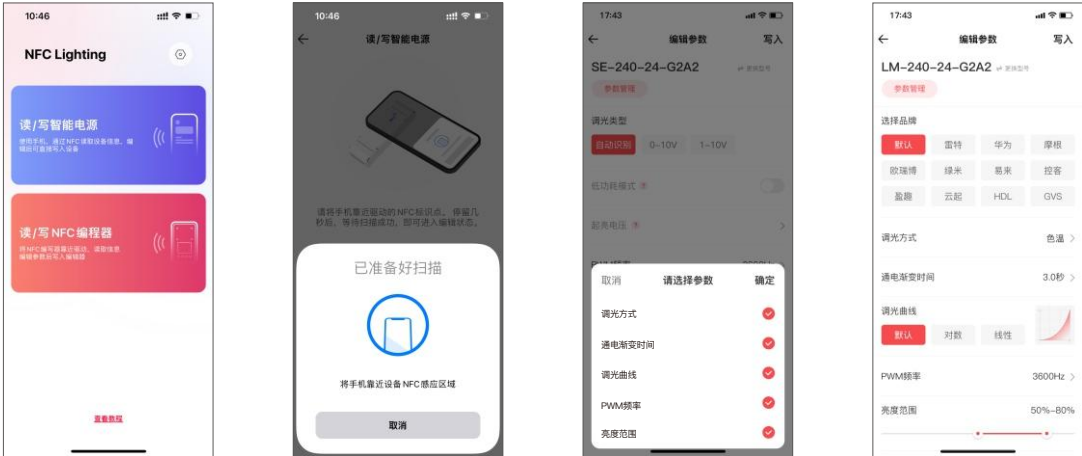

关系图表

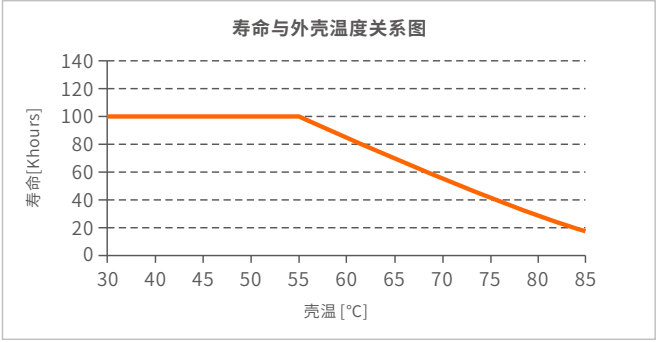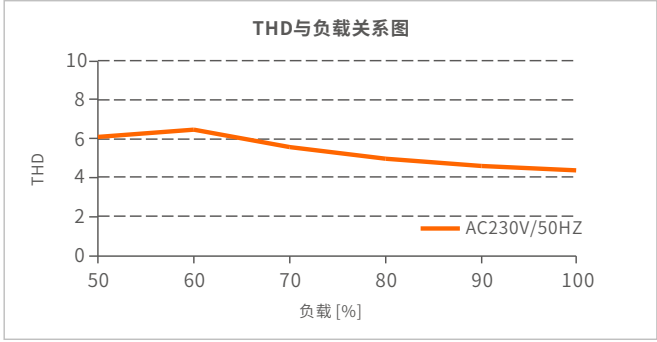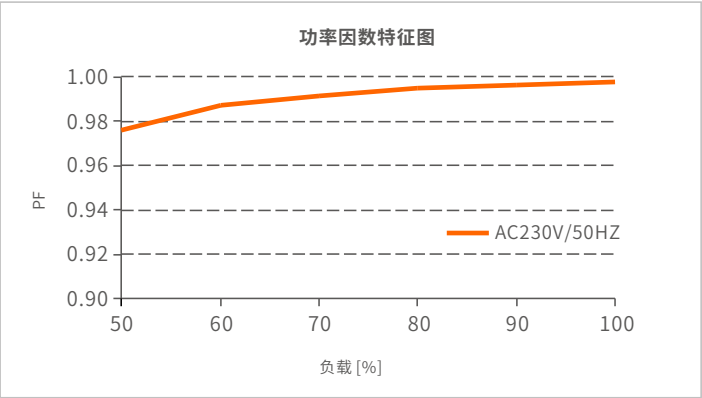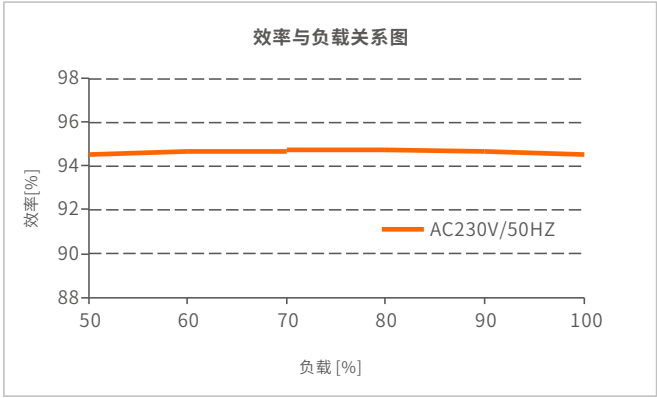


频闪测试表

IEEE 1789

| 低风险区域 (Low Risk) 的波动深度 (Modulation) 限值  |                       |
|-----------------------------------------|-----------------------|
| 光输出波形频率 $f$                             | 限值 (%)                |
| $f \leq 8\text{Hz}$                     | 0.2                   |
| $8\text{Hz} < f \leq 90\text{Hz}$       | $0.025 \times f$      |
| $90\text{Hz} < f \leq 1250\text{Hz}$    | $0.08 \times f$       |
| $f > 1250\text{Hz}$                     | 免除考核                  |
| 无风险区域 (No Effect) 的波动深度 (Modulation) 限值 |                       |
| 光输出波形频率 $f$                             | 限值 (%)                |
| $f \leq 10\text{Hz}$                    | 0.1                   |
| $10\text{Hz} < f \leq 90\text{Hz}$      | $0.01 \times f$       |
| $90\text{Hz} < f \leq 3125\text{Hz}$    | $(0.08/2.5) \times f$ |
| $f > 3125\text{Hz}$                     | 免除考核 (高频豁免)           |


- 亮度
- ▲ 0.1%
  - ◆ 1%
  - ▲ 5%
  - ◆ 10%
  - 20%
  - ▲ 30%
  - 40%
  - ★ 50%
  - 60%
  - 70%
  - 80%
  - ★ 90%
  - ◆ 100%

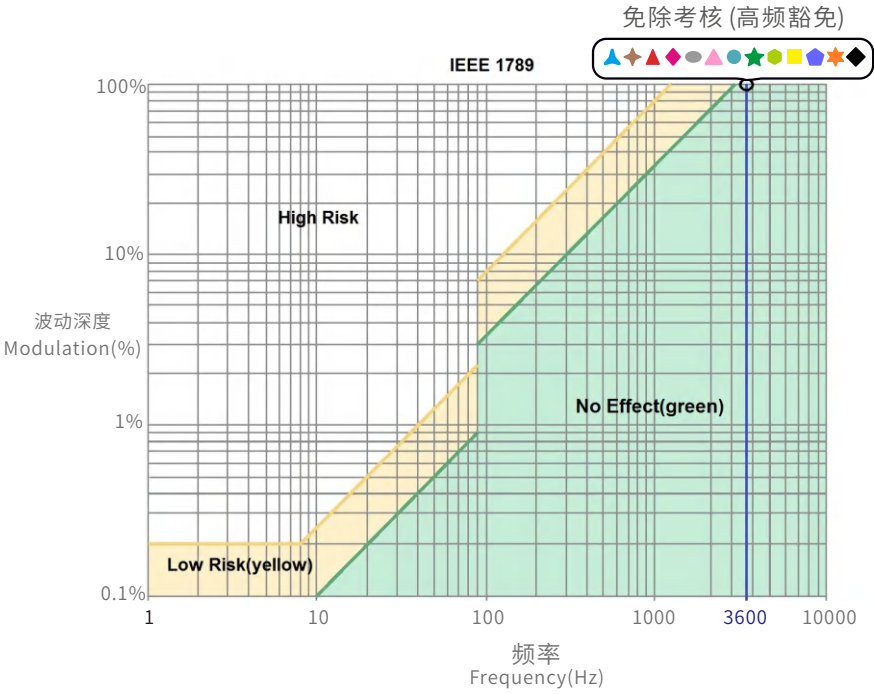

包装规格

|       |                       |
|-------|-----------------------|
| 型号    | LM-240-24-G2A2        |
| 包装箱尺寸 | 400×350×120mm(L×W×H)  |
| 数量    | 10PCS/层；2层/箱；20PCS/箱  |
| 重量    | 0.555kg/PC; 12kg±5%/箱 |

包装样式图

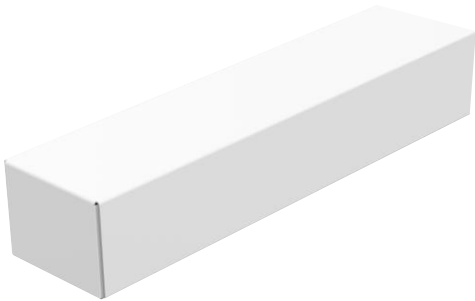

内包装盒



整箱包装

运输和贮存

1. 运输
- 产品适用车、船、飞机交通运输工具运输。
- 在运输中，应使用遮篷进行防雨和防晒，并保持文明装卸，不应有剧烈振动、撞击等。
2. 贮存
- 贮存符合 I 类环境的规定。贮存期限超过6个月的产品建议重新检验，合格后方可使用。



注意事项

- 请由具有专业资格的人员进行调试安装；
- 雷特产品（专有型号除外）不能防水防雷，需避免日晒雨淋，如安装在户外，请用防水箱和防雷装置；
- 良好的散热条件会延长产品的使用寿命，请把产品安装在通风良好的环境；
- 请检查使用的工作电压是否符合产品的参数要求；
- 使用的电线直径大小必须能够负载连接的LED 灯具，并确保接线牢固；
- 通电调试前，应确保所有接线正确，以避免因接线错误而导致灯具损坏；
- 如果发生故障，请勿私自维修；如有疑问，请联系供应商。

※ 本说明书的内容如有变更，恕不另行通知。若内容与您使用的功能有所不同，则以实物为准。如有疑问，欢迎向我司授权的经销商咨询。

保修条例

- 自出厂之日起保修服务期为5年。
- 在保修服务期内出现产品质量问题雷特将给予免费修理或更换服务。

非保修条例:

属下列情况不在免费保修或更换服务范围之内:

- 已经超出保修服务期;
- 过高电压、超负载、操作不当等人为造成的损坏;
- 产品外形严重损坏或变形;
- 自然灾害以及人力不可抗拒原因造成的损坏;
- 产品保修标签和产品唯一条形码损坏;
- 无雷特签订的合同或发票凭证。

1. 修理或更换是雷特对客户的一补救措施。雷特不承担任何附带引起的损害赔偿 responsibility, 除非在适用法律范围之内。
2. 雷特享有修正或调整本保修条款的权利, 并以书面形式发布为准。

更新日志

| 版本 | 更改日期       | 更改内容 | 更改人 |
|----|------------|------|-----|
| A0 | 2023.08.15 | 正稿   | 刘伟丽 |