

Intelligent LED Driver (Constant Voltage)


- The housing is made of V0 flame-retardant PC material, sourced from SAMSUNG/COVESTRO.
- The clamshell design and screwless type for strain-relief. The design of dismountable end cap allows you to adjust the length of housing depending on your needs.
- Supports full-command NFC fast programming. Mobile app via NFC enables changing DMX address, dimming curve, brightness range and other parameters, realizing driver data interaction.
- Support the RDM remote Device Management Protocol.
- Supports DMX512/RDM, Push DIM and corridor light DIM.
- Supports deep dimming from 0-100%, with a minimum dimming level of 0.01%.
- It is equipped with a soft-start gradually brightening function, making the visual experience more comfortable for the human eye.
- Supports Over-the-Air (OTA) online firmware updates for devices
- Complies with the EU ERP Directive on energy efficiency, with no-load power consumption < 0.5W and network standby power consumption < 0.5W
- Innovative thermal management technology intelligently protects the life of the LED driver.
- Includes protections against overheating, overload, short circuit, and open circuit.
- Suitable for Class I/II/III indoor light fixtures.
- Designed for a service life exceeding 100,000 hours under normal operating conditions.
- 5-year warranty (Rubycon capacitor).

RDM
DMX

Flicker-Free

IEEE 1789
Achieve the exemption level

Dimmable:
1:10000

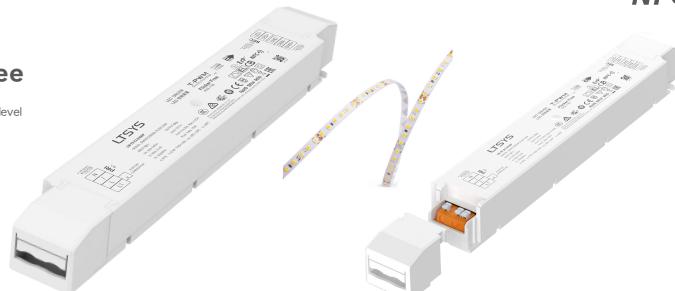

NFC (•)



The certification icon represents undergoing certification applications only, and final certification qualification subject to actual product



Digital dimming



Over Temp. Protection



Over voltage protection



Over Load Protection



Short Circuit Protection


Technical Specs

Model	LM-75-24-G1M2F	LM-75-12-G1M2F
FEATURES	Output Type	Constant Voltage
	Dimming Interface	DMX512/RDM, PUSH DIM
	Output Feature	Isolation
	Protection Grade	IP20
	Insulation Grade	Class II (Suitable for class I /II/III light fixtures)
OUTPUT	Output Voltage	24V \pm
	Output Voltage Range	24V \pm 0.5V \pm
	Output Current	Max. 3.125A
	Output Power	Max. 75W
	Output Power Range	0~75W
	Strobe Level	High frequency exemption level
	Dimming Range	0~100%, down to 0.01%
	Overload Power Limitation	\geq 102%
	Ripple	\leq 300mV
INPUT	PWM Frequency	300-22000Hz
	AC Voltage Range	220-240V \sim
	DC Voltage Range	220-240V \pm (EMI needs to be evaluated after the luminaire is installed)
	Frequency	50/60Hz
	Input Current	Max. 0.4A/230V \sim
	Power Factor	PF>0.98/230V \sim (at full load)
	THD	THD<10%@ 230V \sim (at full load)
	Efficiency (Typ.)	92% 91%
	Standby Power Loss	< 0.5W
	Inrush Current	Cold start 45A(Test twidth=300us tested under 50% lpeak)/230V \sim
	Anti Surge	L-N: 2KV
ENVIRONMENT	Leakage Current	Max. 0.5mA
	Working Temperature	ta: -20 ~ 50°C tc: 80°C
	Working Humidity	20 ~ 95%RH, non-condensing
	Storage Temperature/Humidity	-40 ~ 80°C, 10~95%RH
	Temperature Coefficient	\pm 0.03%/°C(0-50°C)
PROTECTION	Vibration	10-500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively
	Overload Protection	Shut down the output when rated power \geq 102%, auto recovers
	Overheat Protection	Intelligently adjust or turn off the output current if the PCB temperature \geq 110°C, and recover automatically
	Short Circuit Protection	Enter hiccup mode if short circuit occurs, and recover automatically
SAFETY & EMC	Overvoltage Protection	Shut down the output when no-load voltage \geq 28V, and recover automatically Shut down the output when no-load voltage \geq 16V, and recover automatically
	Withstand Voltage	I/P-O/P: 3750V \sim
	Insulation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH
	Safety Standards	CCC China GB19510.1, GB19510.14, GB19510.213
		TUV Germany EN61347-1, EN61347-2-13, EN62493
		CB CB MEMBER STATES IEC61347-1, IEC61347-2-13
		CE European Union EN61347-1, EN61347-2-13, EN62384
		EAC Russia IEC61347-1, IEC61347-2-13
		RCM Australia AS 61347-2-13
	EMC Emission	EN61347-1, EN61347-2-13, EN62384
		CCC China GB/T17743, GB17625.1
		CE European Union EN55015, EN61000-3-2, EN61000-3-3, EN61547
		EAC Russia IEC62493, IEC61547, EH55015
ErP	RCM Australia	EN55015, EN61000-3-2, EN61000-3-3, EN61547
	Power Consumption	< 0.5W(After shutdown by command)
	No-load power consumption	< 0.5W (when no luminaire is connected)
	Flicker/Stroboscopic Effect	IEEE1789 Meet IEEE 1789 standard/High frequency exemption level
OTHERS	CIE SVM	PstLM \leq 1.0, SVM \leq 0.4
	DF	DF \geq 0.9
	Weight(N.W.)	290g \pm 10g
OTHERS	Dimensions	293 \times 43 \times 30mm(L \times W \times H)

This driver is suitable for connecting to resistor-limited LED fixtures (e.g., LED strips). If connected to fixtures with built-in constant-current ICs, it may generate instantaneous surge currents dozens of times higher, triggering overload protection (hiccup-mode flickering). For such fixtures (e.g., MR16 bulbs, buried lights, wall washers, constant-current rigid strips), please specify during ordering to enable firmware reprogramming.


Product Size

Unit: mm

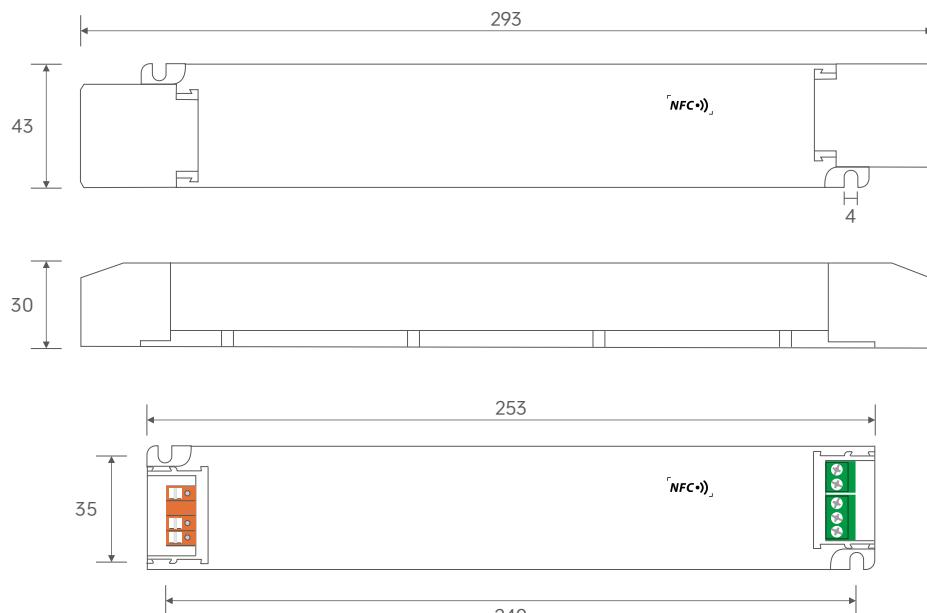


Wiring Diagram

DMX512/RDM Connection

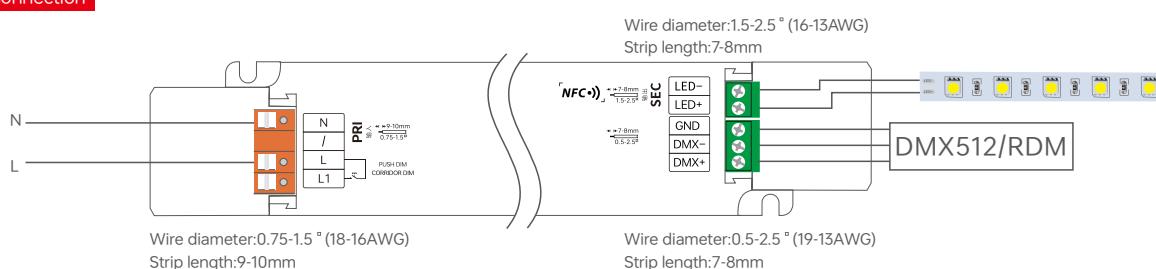

*Power supplies of different models/wattages vary in hardware. Do not use them for dimming the same light film/light box to avoid inconsistent light activation and dimming. Recommend matching the same light film/light box with a power supply of the same model for consistent dimming.

PUSH DIM Connection

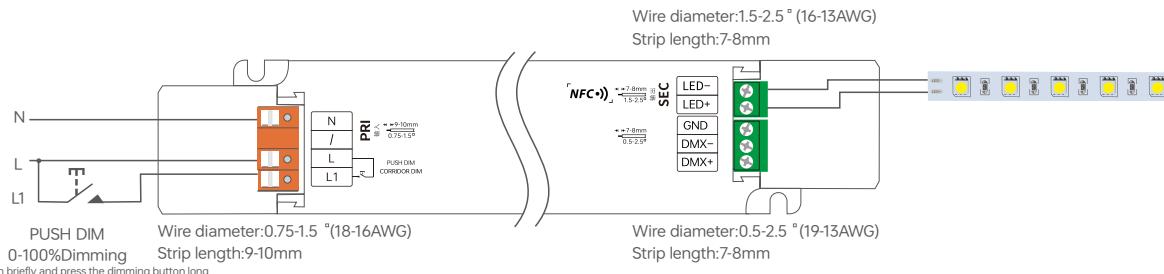

*Dimming interface priority: DMX512/RDM first, PUSH DIM next.
Only when the system failure status setting is set to "Memory" and no DMX data is received, it can be allowed to switch to PUSH DIM.

*The system failure status can be set through NFC lighting/WiFi-RDM.
*Power supplies of different models/wattages vary in hardware. Do not use them for dimming the same light film/light box to avoid inconsistent light activation and dimming. Recommend matching the same light film/light box with a power supply of the same model for consistent dimming.

Switch to PUSH DIM Mode:

Method 1: If it has been switched to the corridor dimming mode, connect the wires according to the PUSH DIM wiring diagram. Press the switch briefly 5 times within 3 seconds of reset button, then press and hold it for 6 seconds, and then press it briefly 5 times within 3 seconds. The driver will automatically switch to the PUSH DIM dimming mode.

Method 2: If it is switched to the corridor mode, you can switch to the PUSH DIM dimming mode through the NFC Lighting app.

PUSH DIM



Short press: on/off control.


Double-click: Not available.

Long press: Adjust the current brightness.

Dimming memory: When the light is switched on/off again, the light will resume to the previously set brightness level.

Reset Switch

Corridor Dimming Application

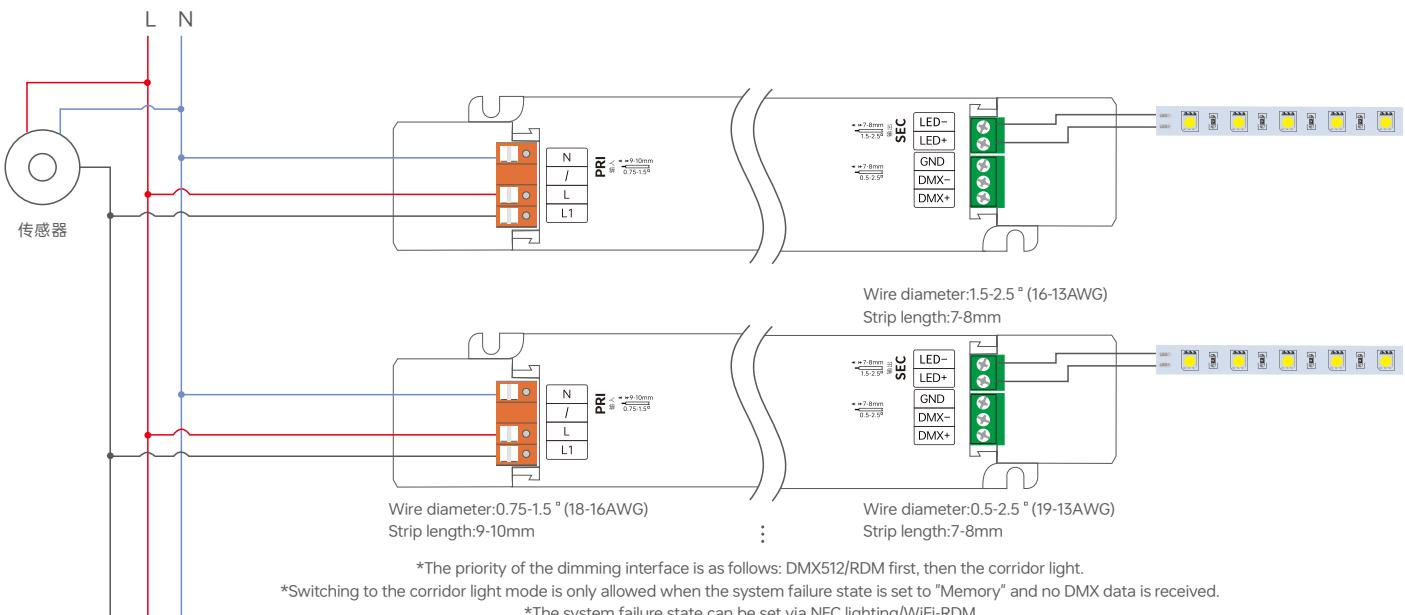

*The priority of the dimming interface is as follows: DMX512/RDM first, then the corridor light.

*Switching to the corridor light mode is only allowed when the system failure state is set to "Memory" and no DMX data is received.

*The system failure state can be set via NFC lighting/WiFi-RDM

*Power supplies of different models/wattages vary in hardware. Do not use them for dimming the same light film/light box to avoid inconsistent light activation and dimming. Recommend matching the same light film/light box with a power supply of the same model for consistent dimming.

Switch to the corridor light mode

Method 1: Configure and switch the corridor light function via NFC, and the Push DIM function will be turned off.


Method 2: After connecting the wires according to the corridor dimming wiring diagram, keep moving within the effective sensing area for more than 2 minutes, and it will automatically switch to the corridor dimming mode with all lights on at full brightness.

Method 3: After connecting the wires according to the corridor dimming wiring diagram, first replace the sensor with a common switch, then turn on the common switch and keep it conducting for 2 minutes. The driver will automatically switch to the corridor dimming mode. After that, remove the common switch and replace it with the sensor again.


Note: During normal operation, it is recommended to set the hold-time of the motion sensor to the minimum.

It is necessary to select a motion sensor with an AC switch.

Corridor Dimming: Working Process

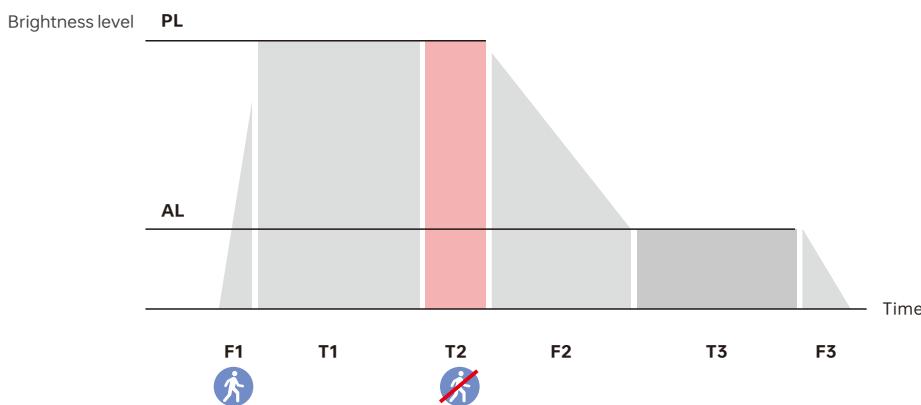

Name	Default	Setting Range
(F1) Gradual Entry Sensing Time	1 s	0-100 s
(PL) Sensing Brightness	255	0-255
(T1) Sensing Holding Time	Set through the sensor	
(T2) Delay Time	30 s	0 s,5 s,10 s,20 s,30 s,45 s,1 min,2 min,3 min,5 min,10 min,20 min,30 min
(F2) Gradual Exit Sensing Time	1 s	0-100 s
(AL) Standby Brightness	100	0-255
(T3) Sensing Standby Time	30 s	0 s,5 s,10 s,20 s,30 s,45 s,1 min,2 mins,3 mins,5 mins,10 mins,20 mins,30 mins,Permanent
(F3) Gradual Exit to Off Time	1 s	0-100 s

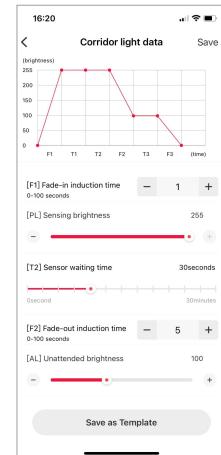

Note: *If the lamp needs to be on standby at a low brightness level, the [T3] Sensing Standby Time should be set to "Permanent".


*The above parameters are set through the NFC lighting APP.

Use with RDM Editor

The DMX driver can work with a DMX address programmer that follows the standard RDM protocol.

It is recommended to use LTECH RDM Programmer (Model: WiFi-RDM01), which can achieve more functions such as remote browsing and parameter setting.

Wiring diagrams below:

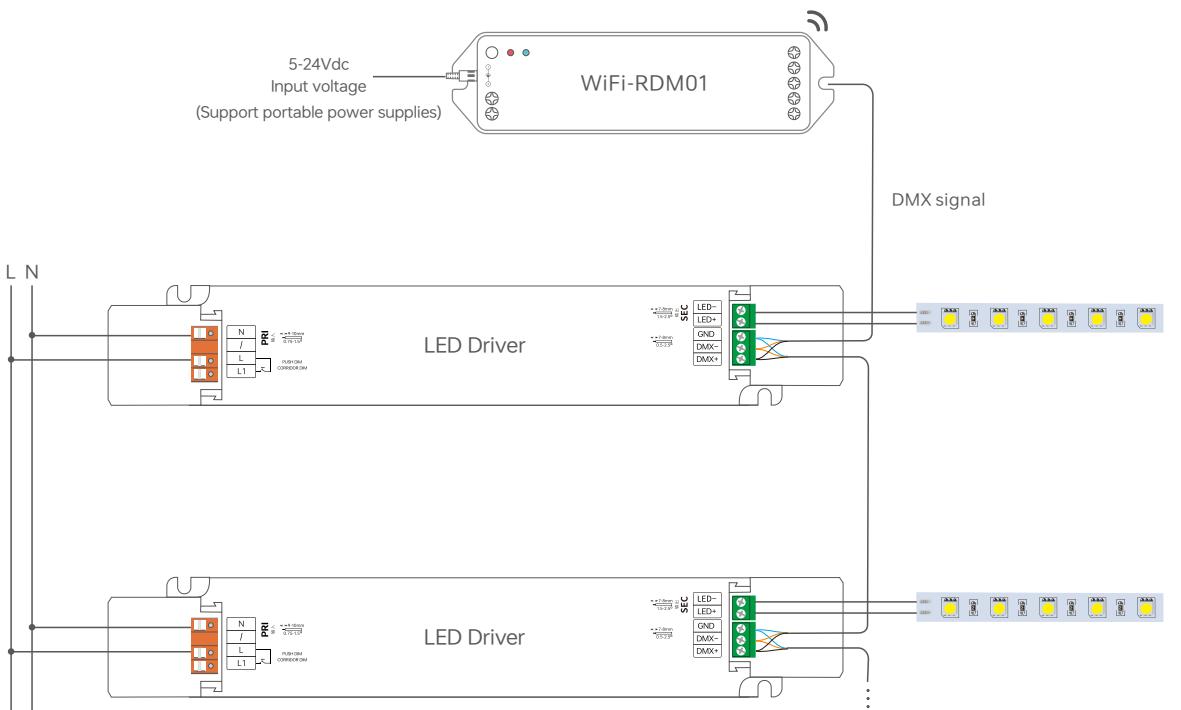


*The default of DMX address of the LED driver is 1

*Power supplies of different models/wattages vary in hardware. Do not use them for dimming the same light film/light box to avoid inconsistent light activation and dimming. Recommend matching the same light film/light box with a power supply of the same model for consistent dimming.

LTECH RDM Programmer APP interface introduction

Download the App with your mobile phone and connect the RDM Programmer successfully, then you are allowed to set parameters through the APP. Please refer to the WiFi-RDM01 manual for more details.

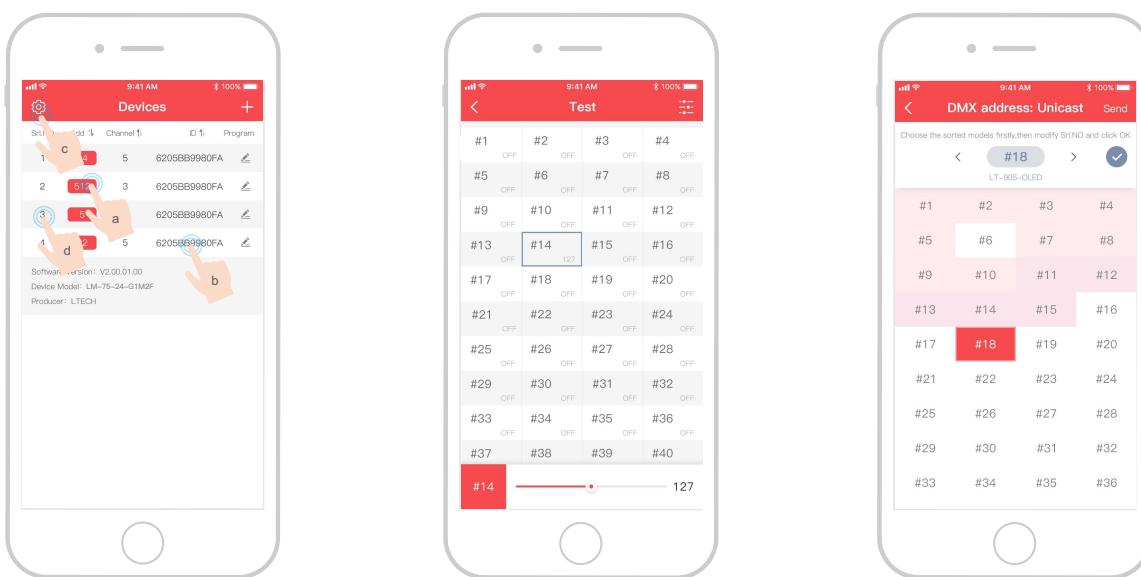

a : Click "Add", edit the address in corresponding box ;

b: Click "ID", get more product details ;

c: Click "⚙", enter the settings interface

d: Click "No.", issue the recognizing command.

Testing

DMX address setting

Use the NFC Lighting APP

Scan the QR code below with your mobile phone and follow the prompts to complete the APP installation (According to performance requirements, you need to use a NFC-capable Android phone, or an iPhone 8 and later that are compatible with iOS 13 or higher).



* Before you begin setting the parameters of the driver, please make sure the driver is powered off.

Read/Write the LED driver

Use your NFC-capable phone to read LED driver data, then edit the parameters and they can be directly written to the driver

1. Read the LED driver

On the APP home page, click 【Read/Write LED driver】 , then keep the programmer's sensing area close to the NFC sensing area of the driver to read the driver parameters.




2. Edit parameters

Click on 【Parameter Management】 to edit more advanced parameters such as DMX Address, Dimming Curve, PWM Frequency, Bit Depth, Brightness Range, Time for Fading to Dim Level, Power-on Status System Failure Level, and Corridor Lights.

3. Write to the driver

After completing the parameter settings, click 【Write】 in the upper right corner, and keep the programmer's sensing area close to the NFC sensing area of the driver, so the parameters can be written to the driver

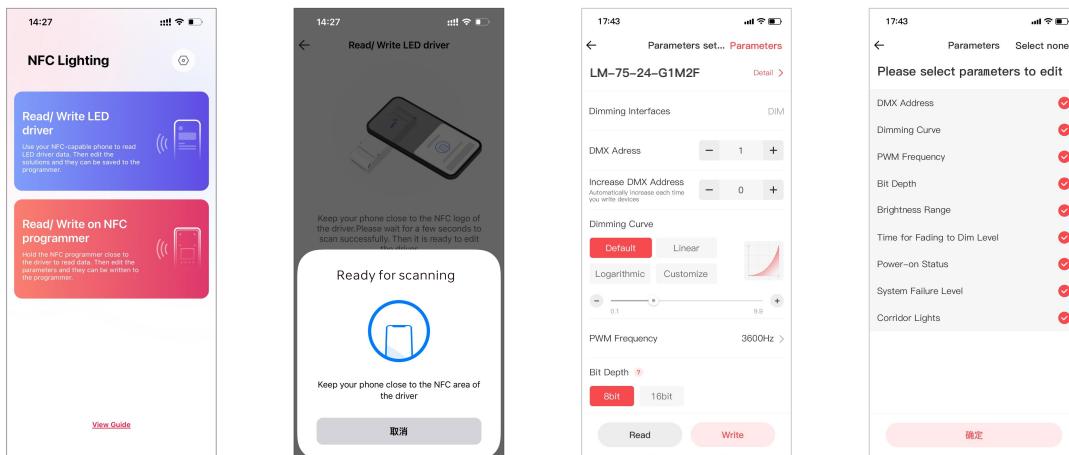

Protective Housing Application Diagram

Tension plate





1. Pry up the protecting housing in the side plate position with a tool.
2. Connect to electrical wires with a screwdriver as wiring diagram shows.
3. Press down the tension plate to fix the the electrical wires, then close the protective housing.

Remove the protective housing





Pull the housing left and right from the bottom to remove it.



Installation Precautions



Please do not stack the products. The distance between two products should be $\geq 15\text{cm}$ so as not to affect heat dissipation and the lifespan of the products.







Please not place the products on power supplies. The distance between the product and the power supplies should be $\geq 15\text{cm}$ so as not to affect heat dissipation or shorten the lifetime of the products.







Do not fix the product screws tightly against the wooden board. Instead, add a washer with a thickness of $\geq 7\text{mm}$ under the fixing screws. Leaving some gaps can effectively dissipate heat, preventing any impact on the product's heat dissipation performance and service life.

Relationship Diagrams

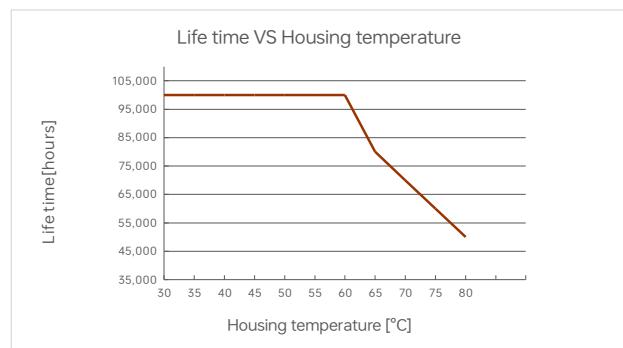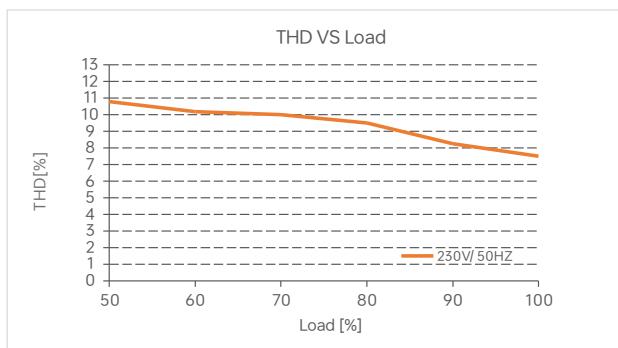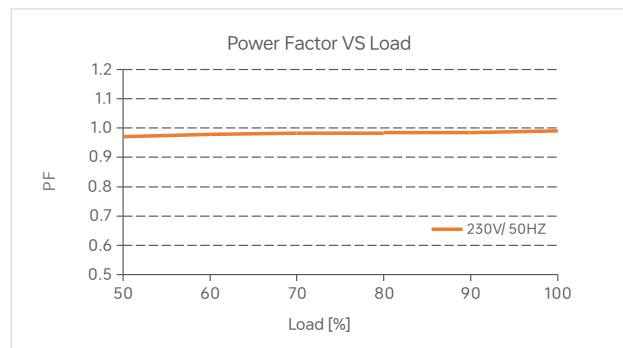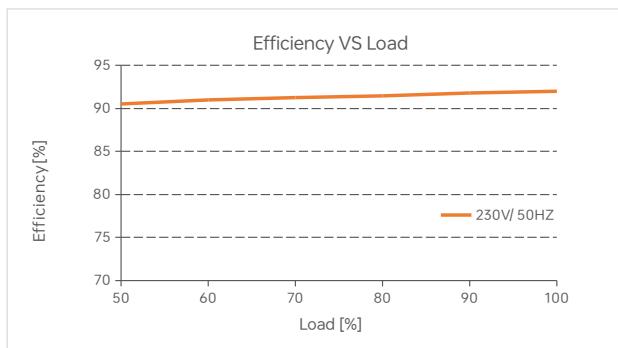

LM-75-24-G1M2F

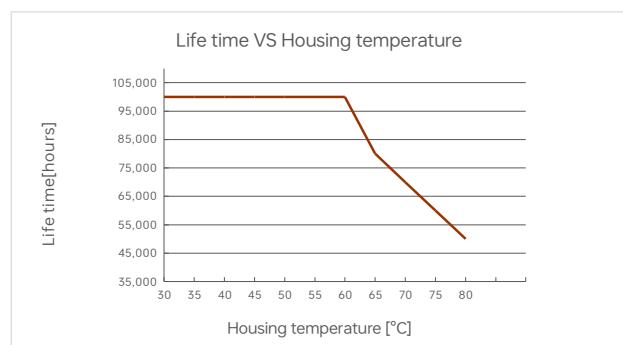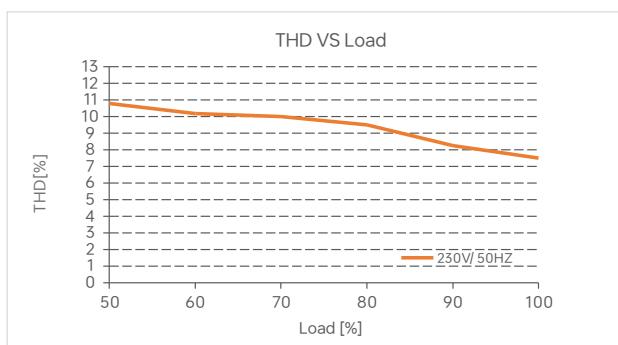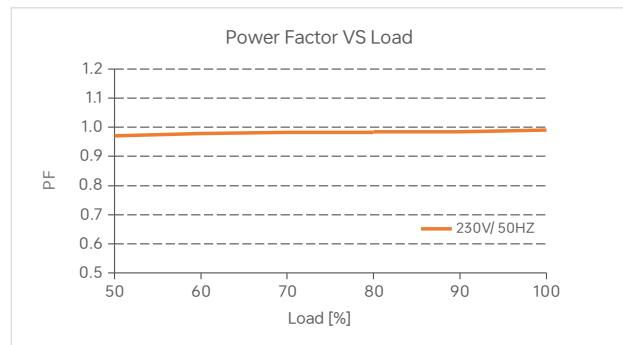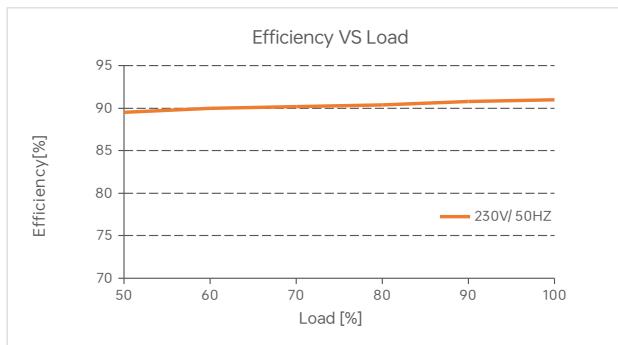

LM-75-12-G1M2F

Surge Current & Corresponding Miniature Circuit Breaker (MCB) Load Capacity Table


MCB Model	B10	B13	B16	B20	B25	C10	C13	C16	C20	C25	D10	D13	D16	D20	D25
Maximum Load Capacity	5	7	8	10	13	8	9	10	12	15	11	12	13	16	19

Remarks:

1. Test Conditions: Cold start 45A(Test twidth=300us tested under 50% Ipeak)/230V ~ .
2. The number of supported drivers may vary depending on the brand and model of the MCB.
3. It is recommended not to exceed the specified load capacity during on-site installation. The actual load should be determined based on field conditions.
4. If the ambient temperature exceeds 30°C or multiple MCBs are installed side by side, the number of installed drivers must be reduced and recalculated accordingly.
5. Electricians typically use Type B MCBs for residential lighting and Type C MCBs for commercial lighting applications.
6. Different testing equipment may yield variations in measured current peaks and pulse widths. Always use professional-grade instruments for accurate testing.

Flicker Test Table


IEEE 1789	
Limit Value of Modulation in Low Risk Areas	
Waveform frequency of Optical output (f)	
f ≤ 8Hz	0.2
8Hz < f ≤ 90Hz	0.025 × f
90Hz < f ≤ 1250Hz	0.08 × f
f > 1250Hz	Exemption assessment
Limit Value of Modulation in No Effect Areas	
Waveform frequency of Optical output (f)	
f ≤ 10Hz	0.1
10Hz < f ≤ 90Hz	0.01 × f
90Hz < f ≤ 3125Hz	(0.08/2.5) × f
f > 3125Hz	Exemption assessment (High frequency exemption)

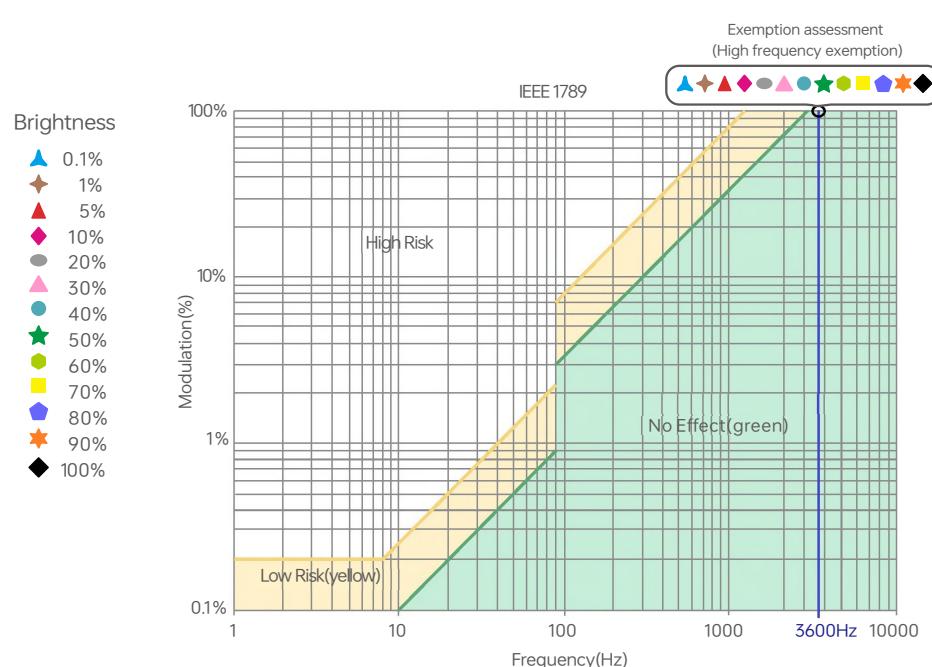

Packaging specification

Model	LM-75-24-G1M2F/LM-75-12-G1M2F
Packaging box size	315×215×240mm(L×W×H)
Quantity	10 PCS per layer, 3 layers per box, 30 PCS per box
Weight	0.29kg per PC, 9.6kg±5% per box

Packaging style drawing

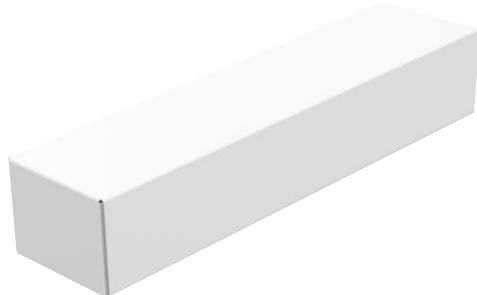

Inner packaging box



Full box packaging

Transportation and Storage

1. Transportation

Products can be shipped via vehicles, boats and planes.

During transportation, products should be protected from rain and sun. Please avoid severe shock and vibration during the loading and unloading process.

2. Storage

The storage conditions should comply with the Class I Environmental Standards. The products that have been stored for more than six months are recommended to be re-inspected and can be used only after they have been qualified.

Attentions

- Product installation and commissioning should be done by a qualified professional.
- LTECH products are not lightningproof non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure they are mounted in a water proof enclosure or in an area equipped with lightning protection devices.
- Good heat dissipation will prolong the working life of products. Please ensure good ventilation.
- Please check if the working voltage used complies with the parameter requirements of products.
- The diameter of wire used must be able to load the light fixtures you connect and ensure the firm wiring.
- Before you power on products, please make sure all the wiring is correct in case of incorrect connection that causes damage to light fixtures.
- If a fault occurs, please do not attempt to fix products by yourself. If you have any question, please contact your suppliers.

※ This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery: 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.

2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.